

MOUNTING TEMPLATE


For installing an Oval Multi-Tech Proximity Reader to the OUTSIDE of door

- Use this template with fire-rated metal doors only! (For solid wood doors, use template WI2571)
- For use with Mortise Locks
- For use with a *Surface-Mounted Networkx Control Module* ("Backbox")
- Use on OUTSIDE of door

IMPORTANT

WHEN PRINTING OR PHOTOCOPYING A TEMPLATE, ALWAYS SELECT PRINTING OPTIONS TO ENSURE THAT COPIES ARE PRODUCED **WITHOUT** SIZE ADJUSTMENTS.

VERIFY THE DIMENSIONS OF THIS BOX ARE 2.000 X 2.000 INCHES ± 0.010.

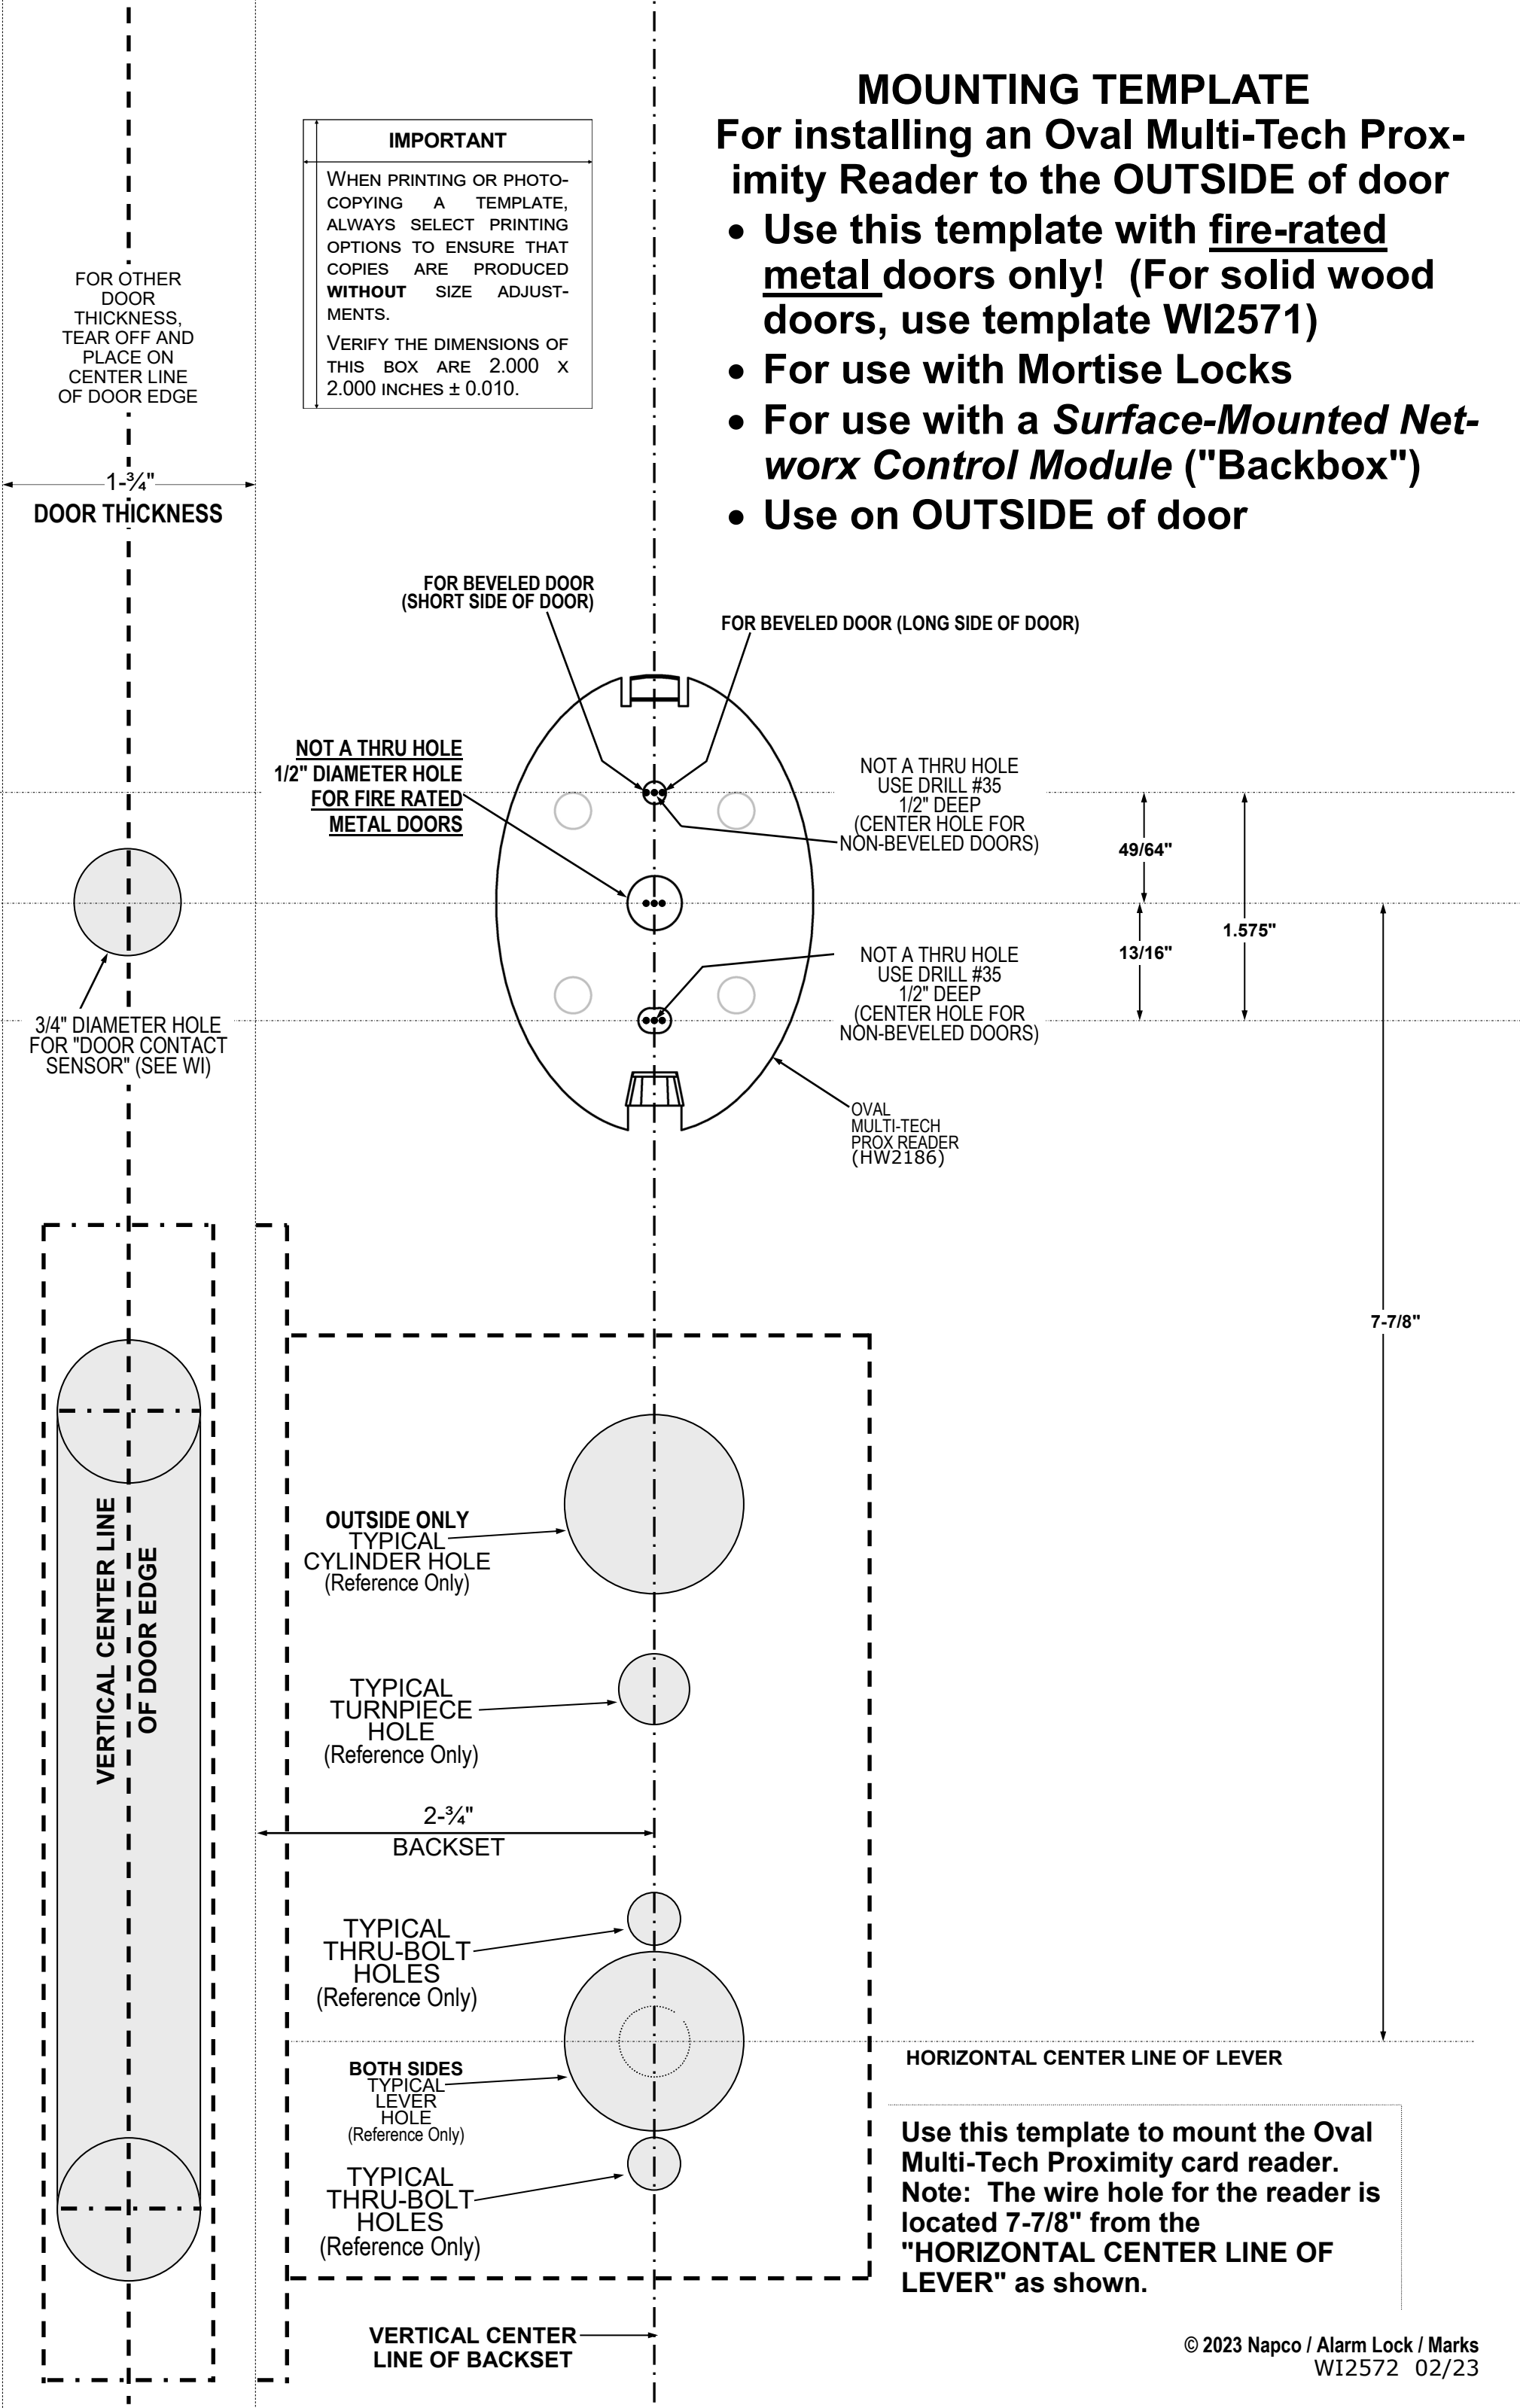

MOUNTING TEMPLATE

For installing an Oval Multi-Tech Proximity Reader to the OUTSIDE of door

- Use this template with fire-rated metal doors only! (For solid wood doors, use template WI2571)
- For use with Mortise Locks
- For use with a *Surface-Mounted Networkx Control Module ("Backbox")*
- Use on OUTSIDE of door



IMPORTANT

WHEN PRINTING OR PHOTOCOPYING A TEMPLATE, ALWAYS SELECT PRINTING OPTIONS TO ENSURE THAT COPIES ARE PRODUCED **WITHOUT** SIZE ADJUSTMENTS.

VERIFY THE DIMENSIONS OF THIS BOX ARE 2.000 X 2.000 INCHES ± 0.010.

FOR OTHER DOOR THICKNESS, TEAR OFF AND PLACE ON CENTER LINE OF DOOR EDGE

1-3/4"
DOOR THICKNESS

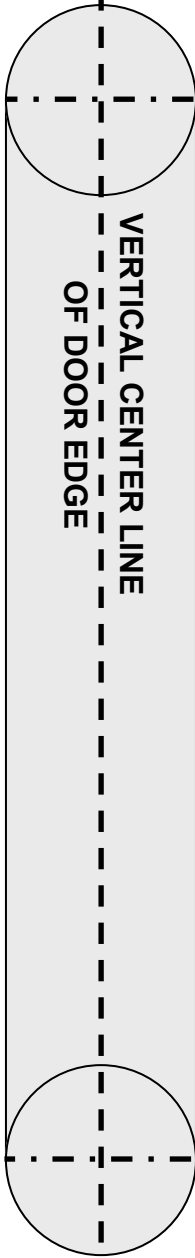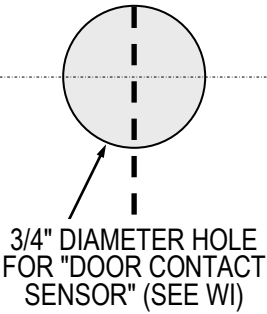

FOR BEVELED DOOR (LONG SIDE OF DOOR)

FOR BEVELED DOOR (SHORT SIDE OF DOOR)

NOT A THRU HOLE
USE DRILL #35
1/2" DEEP
(CENTER HOLE FOR NON-BEVELED DOORS)

NOT A THRU HOLE
1/2" DIAMETER HOLE
FOR FIRE RATED METAL DOORS

NOT A THRU HOLE
USE DRILL #35
1/2" DEEP
(CENTER HOLE FOR NON-BEVELED DOORS)

OVAL MULTI-TECH PROX READER (HW2186)

49/64"

13/16"

1.575"

7-7/8"

HORIZONTAL CENTER LINE OF LEVER

Use this template to mount the proximity card reader.
Note: The wire hole for the reader is located 7-7/8" from the "HORIZONTAL CENTER LINE OF LEVER" as shown.

OUTSIDE ONLY
TYPICAL CYLINDER HOLE
(Reference Only)

TYPICAL TURNPIECE HOLE
(Reference Only)

2-3/4"
BACKSET

TYPICAL THRU-BOLT HOLES
(Reference Only)

BOTH SIDES
TYPICAL LEVER HOLE
(Reference Only)

TYPICAL THRU-BOLT HOLES
(Reference Only)

VERTICAL CENTER LINE OF BACKSET